



Features

- Low current consumption - High sound pressure
- Compact, light design
- High reliability and no contact noise
- Easy-mounting
- Wide variety of tones can be made by cavity designing
- Functions over a wide range of Input Voltage

Applications

- Confirmation tone for various office automation equipment
- Automobiles, microwave ovens, refrigerators
- Clocks, toys, game machines


How to Order

KBS - 27 DB - 3 A
 ① ② ③ ④ ⑤

- ① Series
- ② Diameter(mm)
- ③ Appearance (Buzzer with casing)
- ④ Resonant Frequency
- ⑤ Type of Terminals
(A:With lead, P:Round pin)

Dimensions

(Unit : mm)

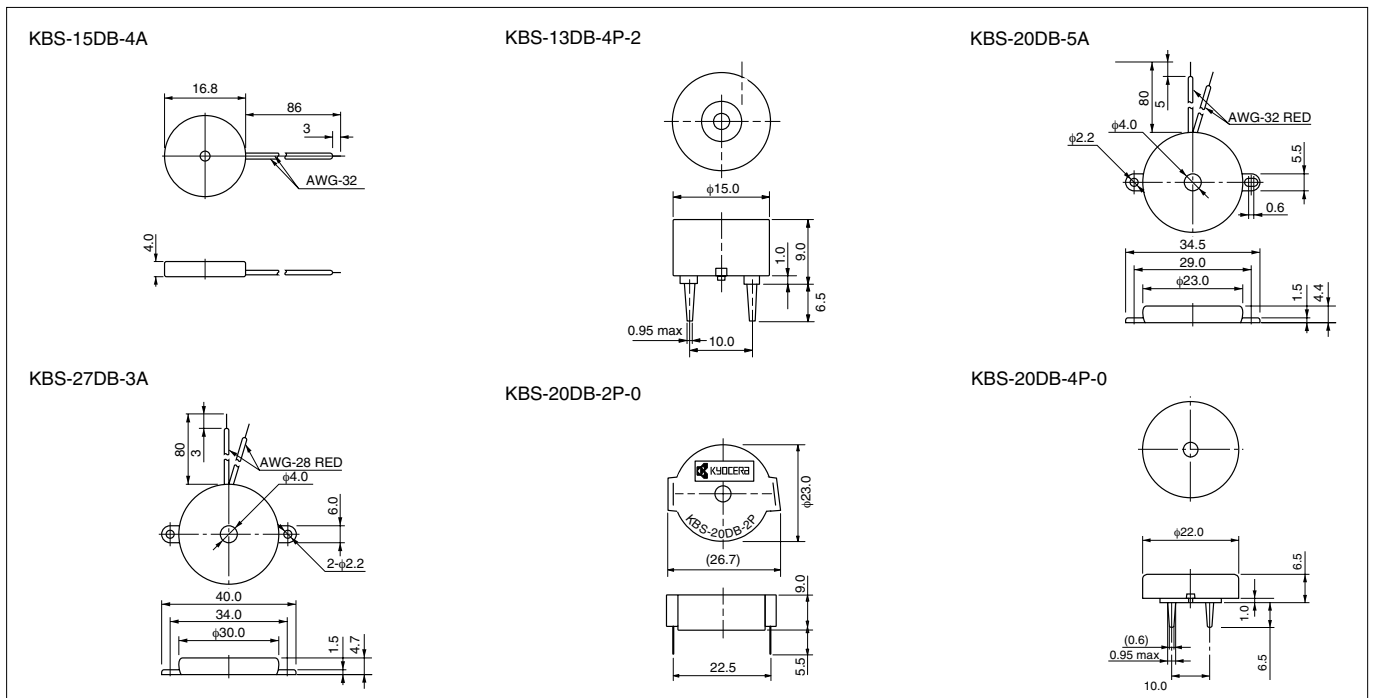

Specifications

| Part Number | Sound Pressure Level | Capacitance |
|---------------|----------------------------------|-------------|
| KBS-13DB-4P-2 | 73db min 4.096kHz 10Vp-p SQ 30cm | 10nF±30% |
| KBS-20DB-2P-0 | 75db min 2.048kHz 10Vp-p SQ 30cm | 24nF±30% |
| KBS-20DB-4P-0 | 77db min 4.096kHz 10Vp-p SQ 30cm | 14nF±30% |
| KBS-15DB-4A | 72db min 4.096kHz 10Vp-p SQ 30cm | 9.5nF±30% |
| KBS-20DB-5A | 75db min 5.0kHz 10Vp-p SQ 30cm | 10nF±30% |
| KBS-27DB-3A | 75db min 3.0kHz 10Vp-p SQ 30cm | 20nF±30% |