


Coax Cable - RG11A/U

▶ 75 ohm Characteristic Impedance

RG11A/U

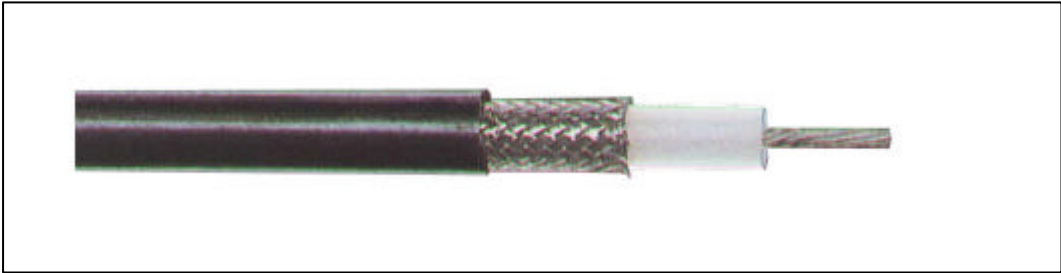

▶ **construction**

Order No.	RG11A/U
Inner Conductor	7 x 0.40 mm tinned copper
Insulation	PE 7.2 mm Ø
Shielding	bare copper braid, coverage > 90%
Jacket	PVC black
Overall Diameter	10.3 mm

▶ **mechanic**

Weight	125 g/m
Temperature Range	-10 °C / +80 °C
Min. Bending Radius	105 mm

▶ **electric**

Impedance	75 Ω ± 3
Attenuation / 100 m	50 MHz : 4.5 dB 100 MHz : 6.5 dB 200 MHz : 9.5 dB 400 MHz : 14.1 dB 800 MHz : 21.9 dB 1000 MHz : 25.5 dB
Velocity of Propagation	66%
DC Resistance	
Inner Conductor	21 Ω/ km
Outer Conductor	8 Ω/ km
Capacitance	67 pF / m

Technical alternations reserved